


APPLICATION CHART

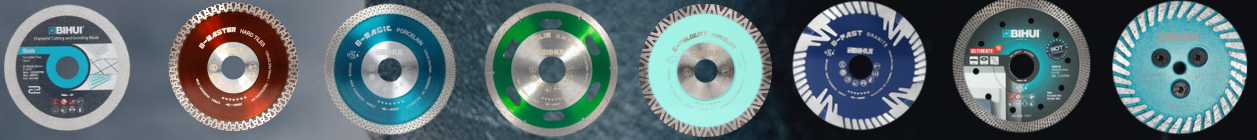

	DPG125	DCDA125	DCDW125	DCDS125	DCDV125	DCDF125	DCAB125	DCW60
Dry Use 	●	●	●	●	●	●	●	●
Wet Use 	●	●	●	●	●		●	●
Porcelain Tiles	●	●	●	●	●		●	●
Ceramic Tiles		●	●	●	●		●	●
Slate		●		●	●		●	
Marble			●					●
Granite						●		
Terracotta		●	●	●				
Concrete						●		
Glazed Clinker				●			●	
Hard Tile		●			●		●	
Slim Slab	●	●	●	●			●	
Big Slab	●	●	●	●			●	
Mosaic Tiles				●			●	
Glass Mosaic	●			●				
Stone						●		●
Hard Bricks						●	●	
Cutting	●	●	●	●	●	●	●	●
Grinding	●							
Bevelling	●							

SPECIFICATIONS

	DPG125	DCDA125	DCDW125	DCDS125	DCDV125	DCDF125	DCW60
Blade Diameter	125mm / 5"	125mm / 5"	125mm / 5"	125mm / 5"	125mm / 5"	125mm / 5"	60mm
Bore Size	22.23mm / 7/8"	22.23mm / 7/8"	22.23mm / 7/8"	22.23mm / 7/8"	22.23mm / 7/8"	22.23mm / 7/8"	M14 Thread
Segment Width	30mm	10mm	10mm	7mm	10mm	12mm	6mm
Maximum RPM	12250RPM	12250RPM	12250RPM	12250RPM	12250RPM	12250RPM	10200RPM

-  = Ideal material for cutting
-  = Suitable material for cutting
-  = NOT suitable for cutting